


REV-NO.		DATE	Engineer

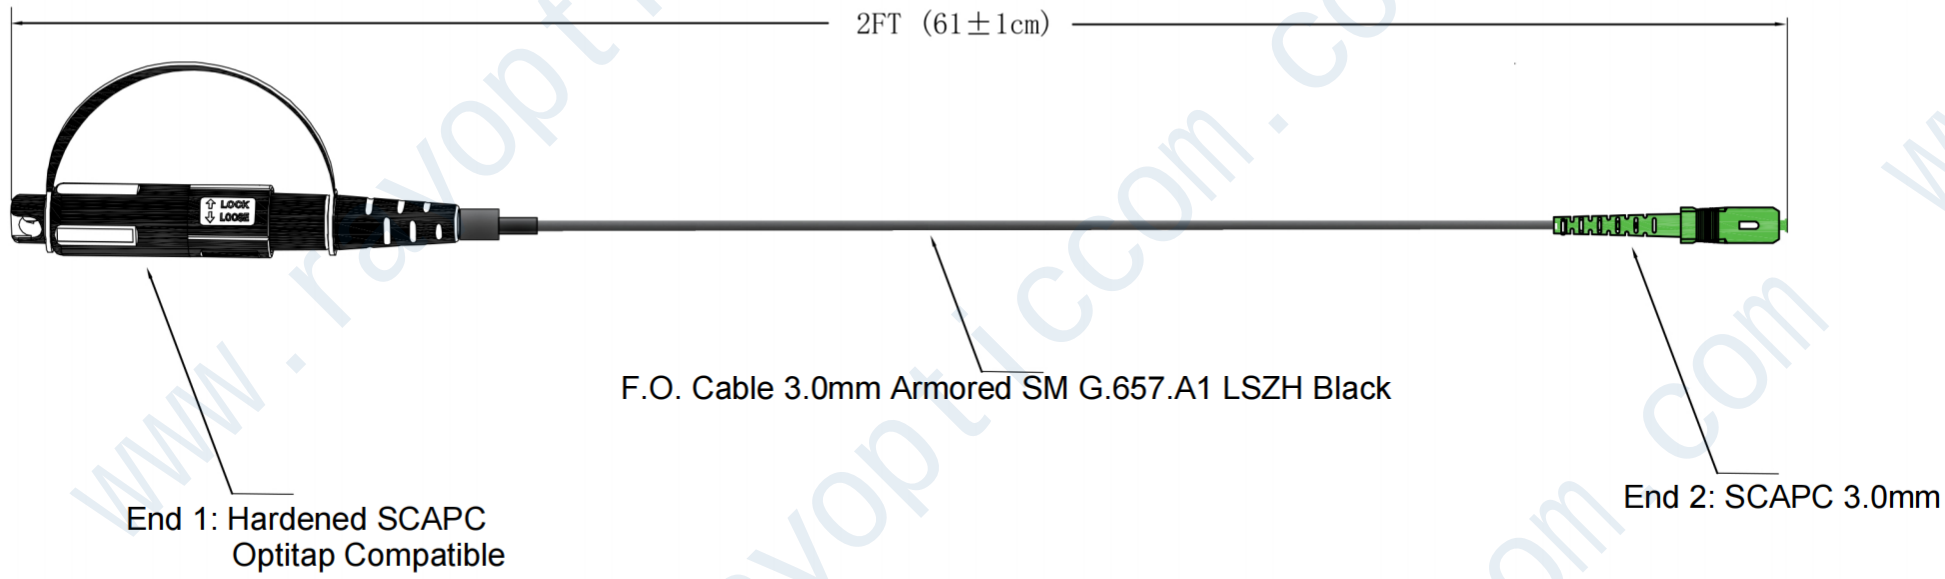

Description: Test Patch Cord 3.0mm Armored SM G.657.A1 LSZH Black (end1) Hardened SC/APC to (end2) SC/APC 2FT	
Technical Parameters	
Item	Parameter
End 1	Hardened SCAPC Optitap Compatible
End 2	SCAPC
Insertion Loss (dB) @1310&1550nm	Typical<0.15, Max<0.2
Return Loss (dB)	>60
Radius of Curvature(mm)	5~12
Fiber Undercut and Protrusion(nm)	-100 to +100
Apex Offset(μm)	0 to 50
Angle Error(°)	8±0.3
Operation Temperature	-40~+70℃

Fiber Optic Connectivity

RAYOPTIC COMM

DESIGNED BY: Jack Li

DATE: 10-18-2025

APPROVED BY: Xiong Wei

DATE: 10-20-2025

Rayoptic Communication Co., Ltd

CUSTOMER:

MATERIAL:

PART NAME:

SHRINKAGE:

PART NO:

SCALE:

REV:

Test Jumper

JOB NO:

SHEET NO: 1/1